STV/C



IMPIANTO COMPATTO DI RICEZIONE E TRATTAMENTO BOTTINI

COMPACT PLANT FOR CESSPOOL ACCEPTANCE

STV/C - IMPIANTO COMPATTO DI RICEZIONE E TRATTAMENTO

L'STV/C è un'unità compatta in grado di effettuare il pretrattamento di grigliatura delle acque reflue derivanti da processi industriali di vario tipo.
Prima che queste vengano immesse negli impianti di depurazione.
L'ingresso è dotato di un attacco rapido tipo "perrot" con valvola elettromeccanica; i reflui, scaricati direttamente dall'autobotte, vengono filtrati da una filtrococlea che rimuove le sostanze solide che poi vengono drenate e compattate e quindi scaricate in un cassone oppure insaccate.

FUNZIONI
- Filtrazione
- Drenaggio/compattazione del solido rimosso

VANTAGGI
- Assenza di odori
- Assenza di occlusioni
- Bassi costi di gestione e manutenzione
- Macchina compatta
- Lavori edili non necessari
- Basso contenuto residuo di materia organica
- Riduzione fino al 40% in volume del solido asportato
- Assenza di pompe

CARATTERISTICHE COSTRUTTIVE

Portata in ingresso	Fino a 100 m^3/h
Foratura vaglio	ø 3 ÷ ø 7 mm foro tondo

STV/C - COMPACT PLANT FOR CESSPOOL ACCEPTANCE

STV / C is a unit compact able to carry out the pretreatment of screening of waste water from industrial processes of various types. Before they are released in wastewater treatment plants.
The entrance is equipped with a quick attack (Perrot type) and an electromechanical valve.
The wastewater discharged directly from the tanker, is filtered by a screw screen that removes the solids that are then drained and compacted and then discharged into a bin or bagged.

FEATURES
- *Filtration*
- *Drainage / compaction of the solid removed*


ADVANTAGES
- *No odor*
- *No obstructions*
- *Low operating costs and maintenance*
- *Compact machine*
- *Construction work is not necessary*
- *Low residual content of organic matter*
- *Reduction of up to 40% by volume of the solid removed*
- *No pumps*

MANUFACTURING FEATURES

Inlet flow rate	up to 100 m^3/h
Filtering options	ø 3 ÷ ø 7 mm foro holes





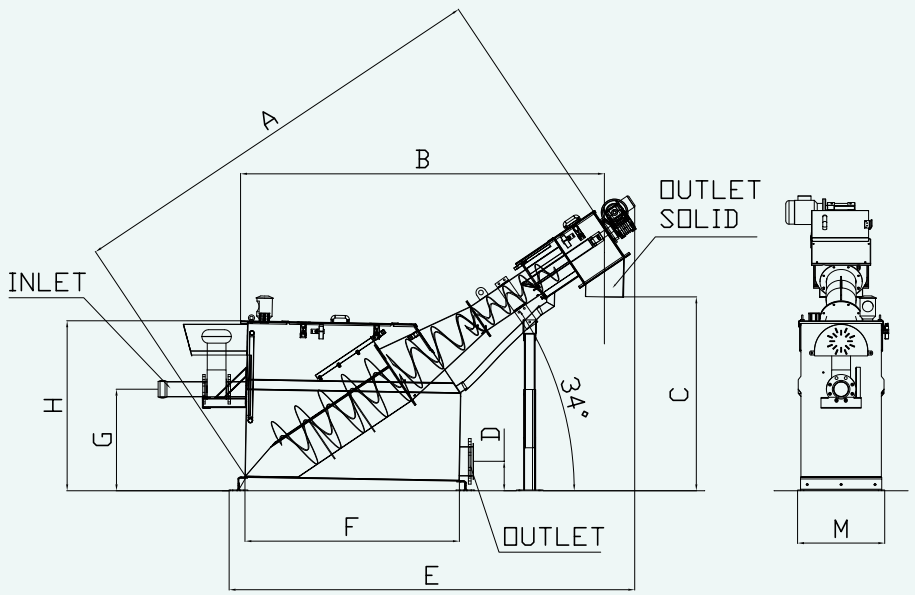

DETTAGLI TECNICI *TECHNICAL DETAILS*

Model	SCREEN	Kw SCREEN	Kw VALVE	m³/h FLOWRATE	INLET	OUTLET
STV/C 50	FCP 50	1,10	0,18	50	DN 100	DN 200
STV/C 75	FCP 60	1,50	0,18	75	DN 100	DN 200
STV/C 100	FCP 70	1,50	0,18	100	DN 100	DN 200

TYPE	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	ØI mm	ØL mm	M mm	Weight Kg
STV/C 50	3550	2800	1500	220	3050	1600	758	1280	219	273	680	630
STV/C 75	4000	3290	1700	220	3750	1750	957	1440	323	323	810	780
STV/C 100	4510	3650	1890	220	4050	2000	1140	1600	323	323	856	940



I dati riportati nel presente catalogo non sono impegnativi e possono subire variazioni in qualsiasi momento.
Rights reserved to modify technical specifications.

SEFT S.r.l.
Via Aperte, 195
41038 San Felice sul Panaro (MO) - Italy
tel. +39 0535 84544 - fax +39 0535 85585
e-mail: seft@seft.it PEC: seftsrl@legalmail.it
www.seft.it