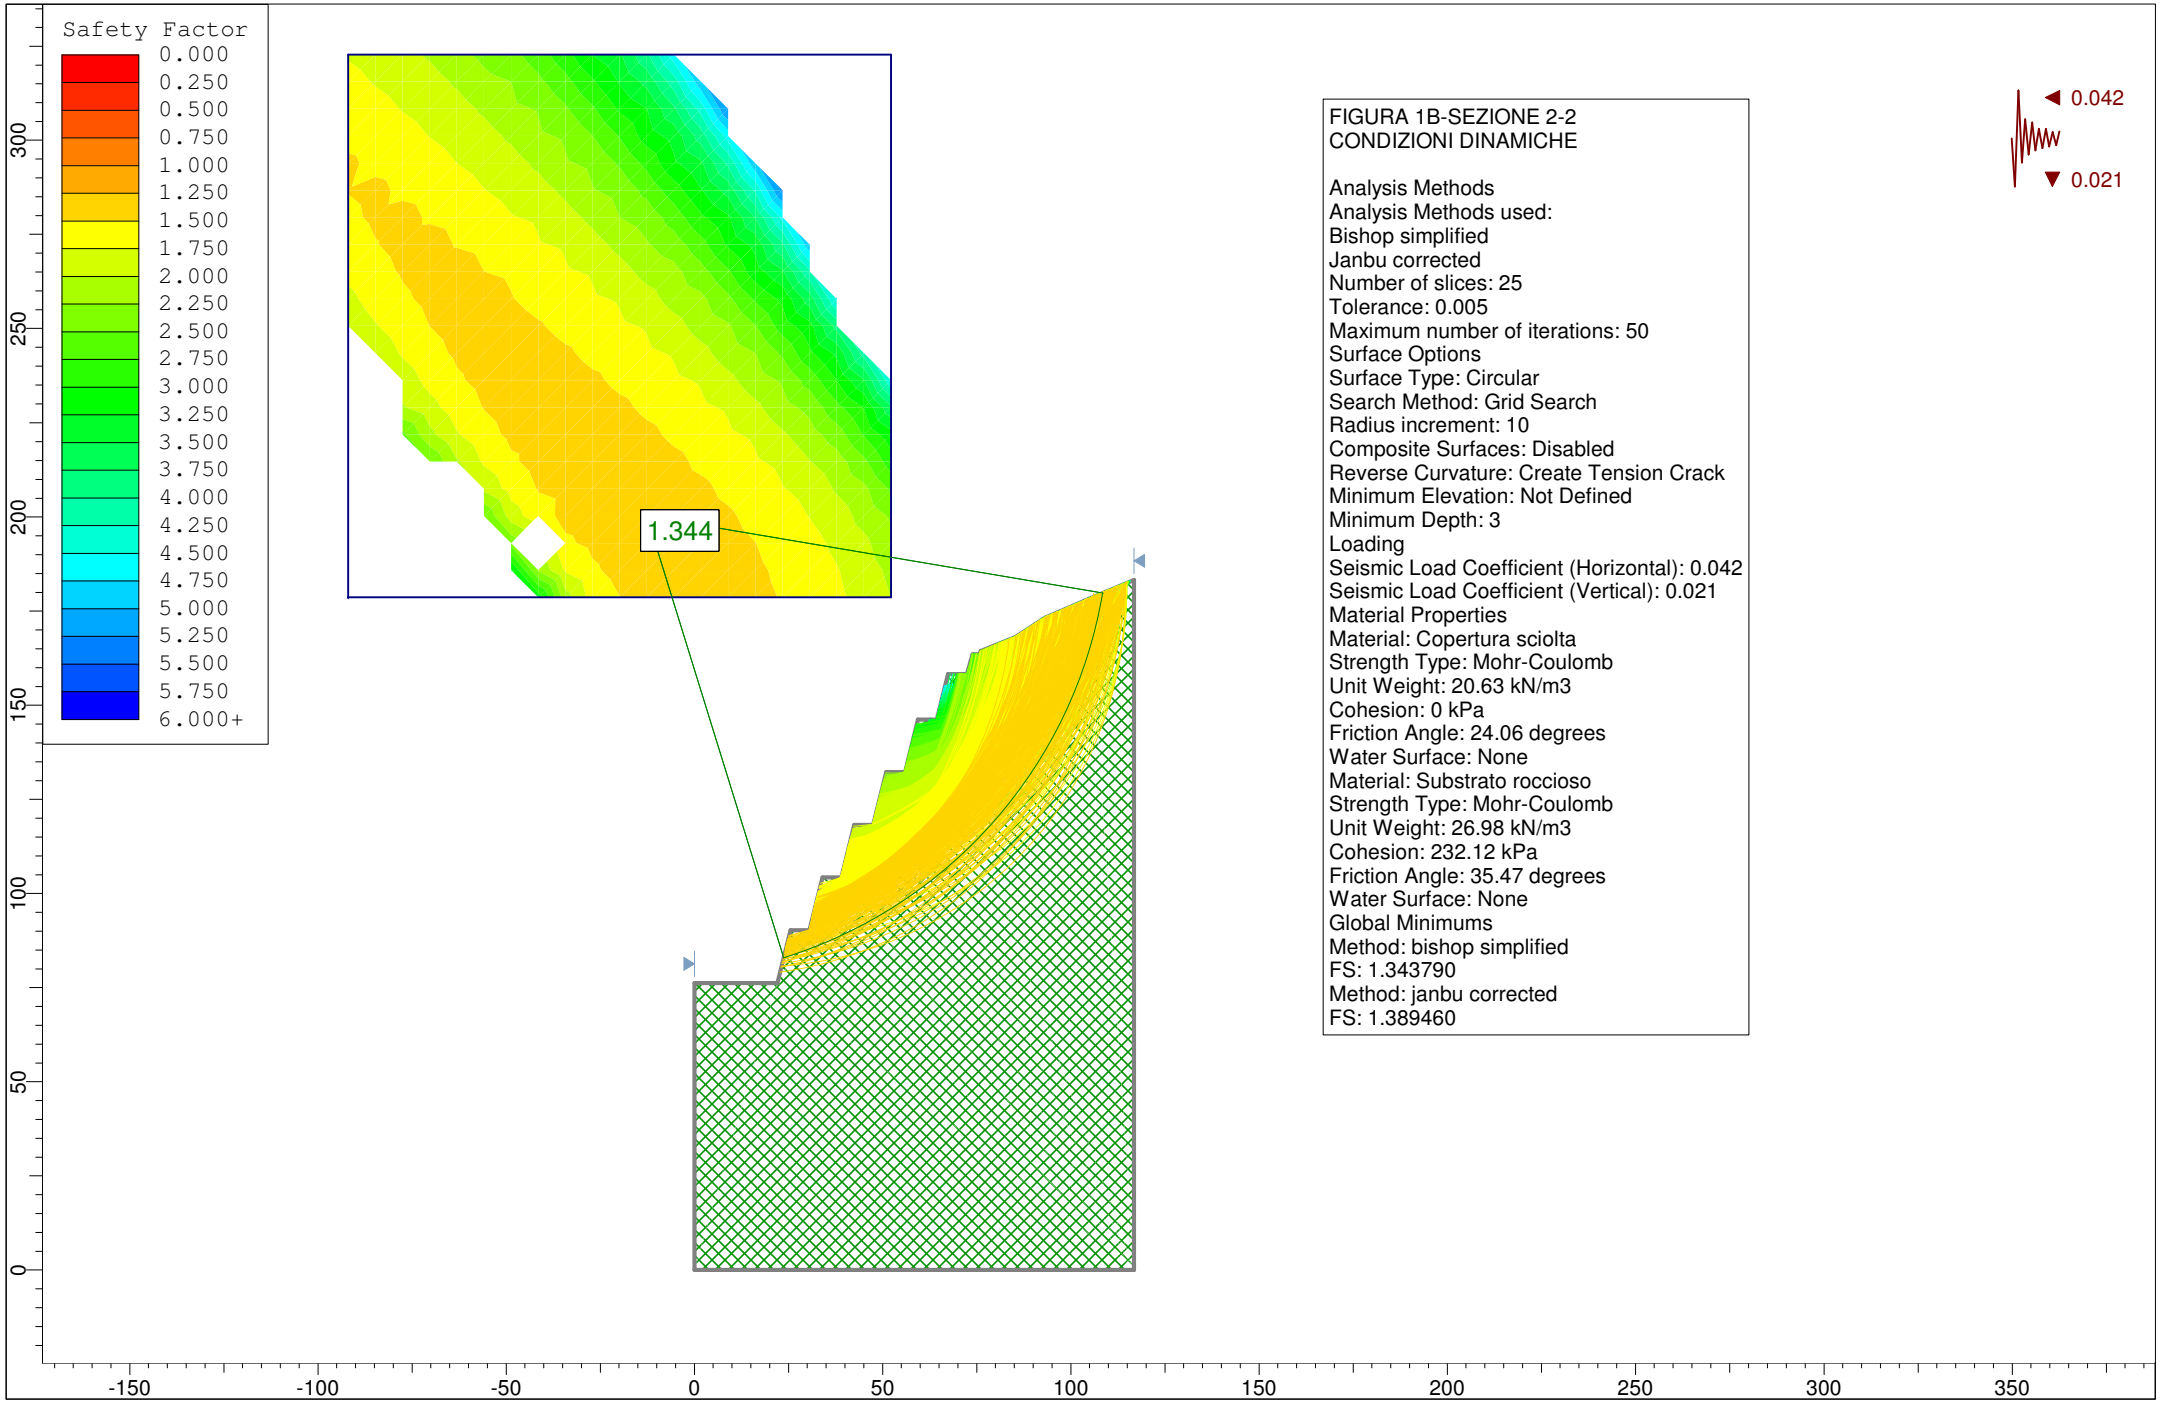


FIGURA 1B-SEZIONE 2-2
CONDIZIONI DINAMICHE

Analysis Methods
Analysis Methods used:
Bishop simplified
Janbu corrected
Number of slices: 25
Tolerance: 0.005
Maximum number of iterations: 50
Surface Options
Surface Type: Circular
Search Method: Grid Search
Radius increment: 10
Composite Surfaces: Disabled
Reverse Curvature: Create Tension Crack
Minimum Elevation: Not Defined
Minimum Depth: 3
Loading
Seismic Load Coefficient (Horizontal): 0.042
Seismic Load Coefficient (Vertical): 0.021
Material Properties
Material: Copertura sciolta
Strength Type: Mohr-Coulomb
Unit Weight: 20.63 kN/m3
Cohesion: 0 kPa
Friction Angle: 24.06 degrees
Water Surface: None
Material: Substrato roccioso
Strength Type: Mohr-Coulomb
Unit Weight: 26.98 kN/m3
Cohesion: 232.12 kPa
Friction Angle: 35.47 degrees
Water Surface: None
Global Minimums
Method: bishop simplified
FS: 1.343790
Method: janbu corrected
FS: 1.389460