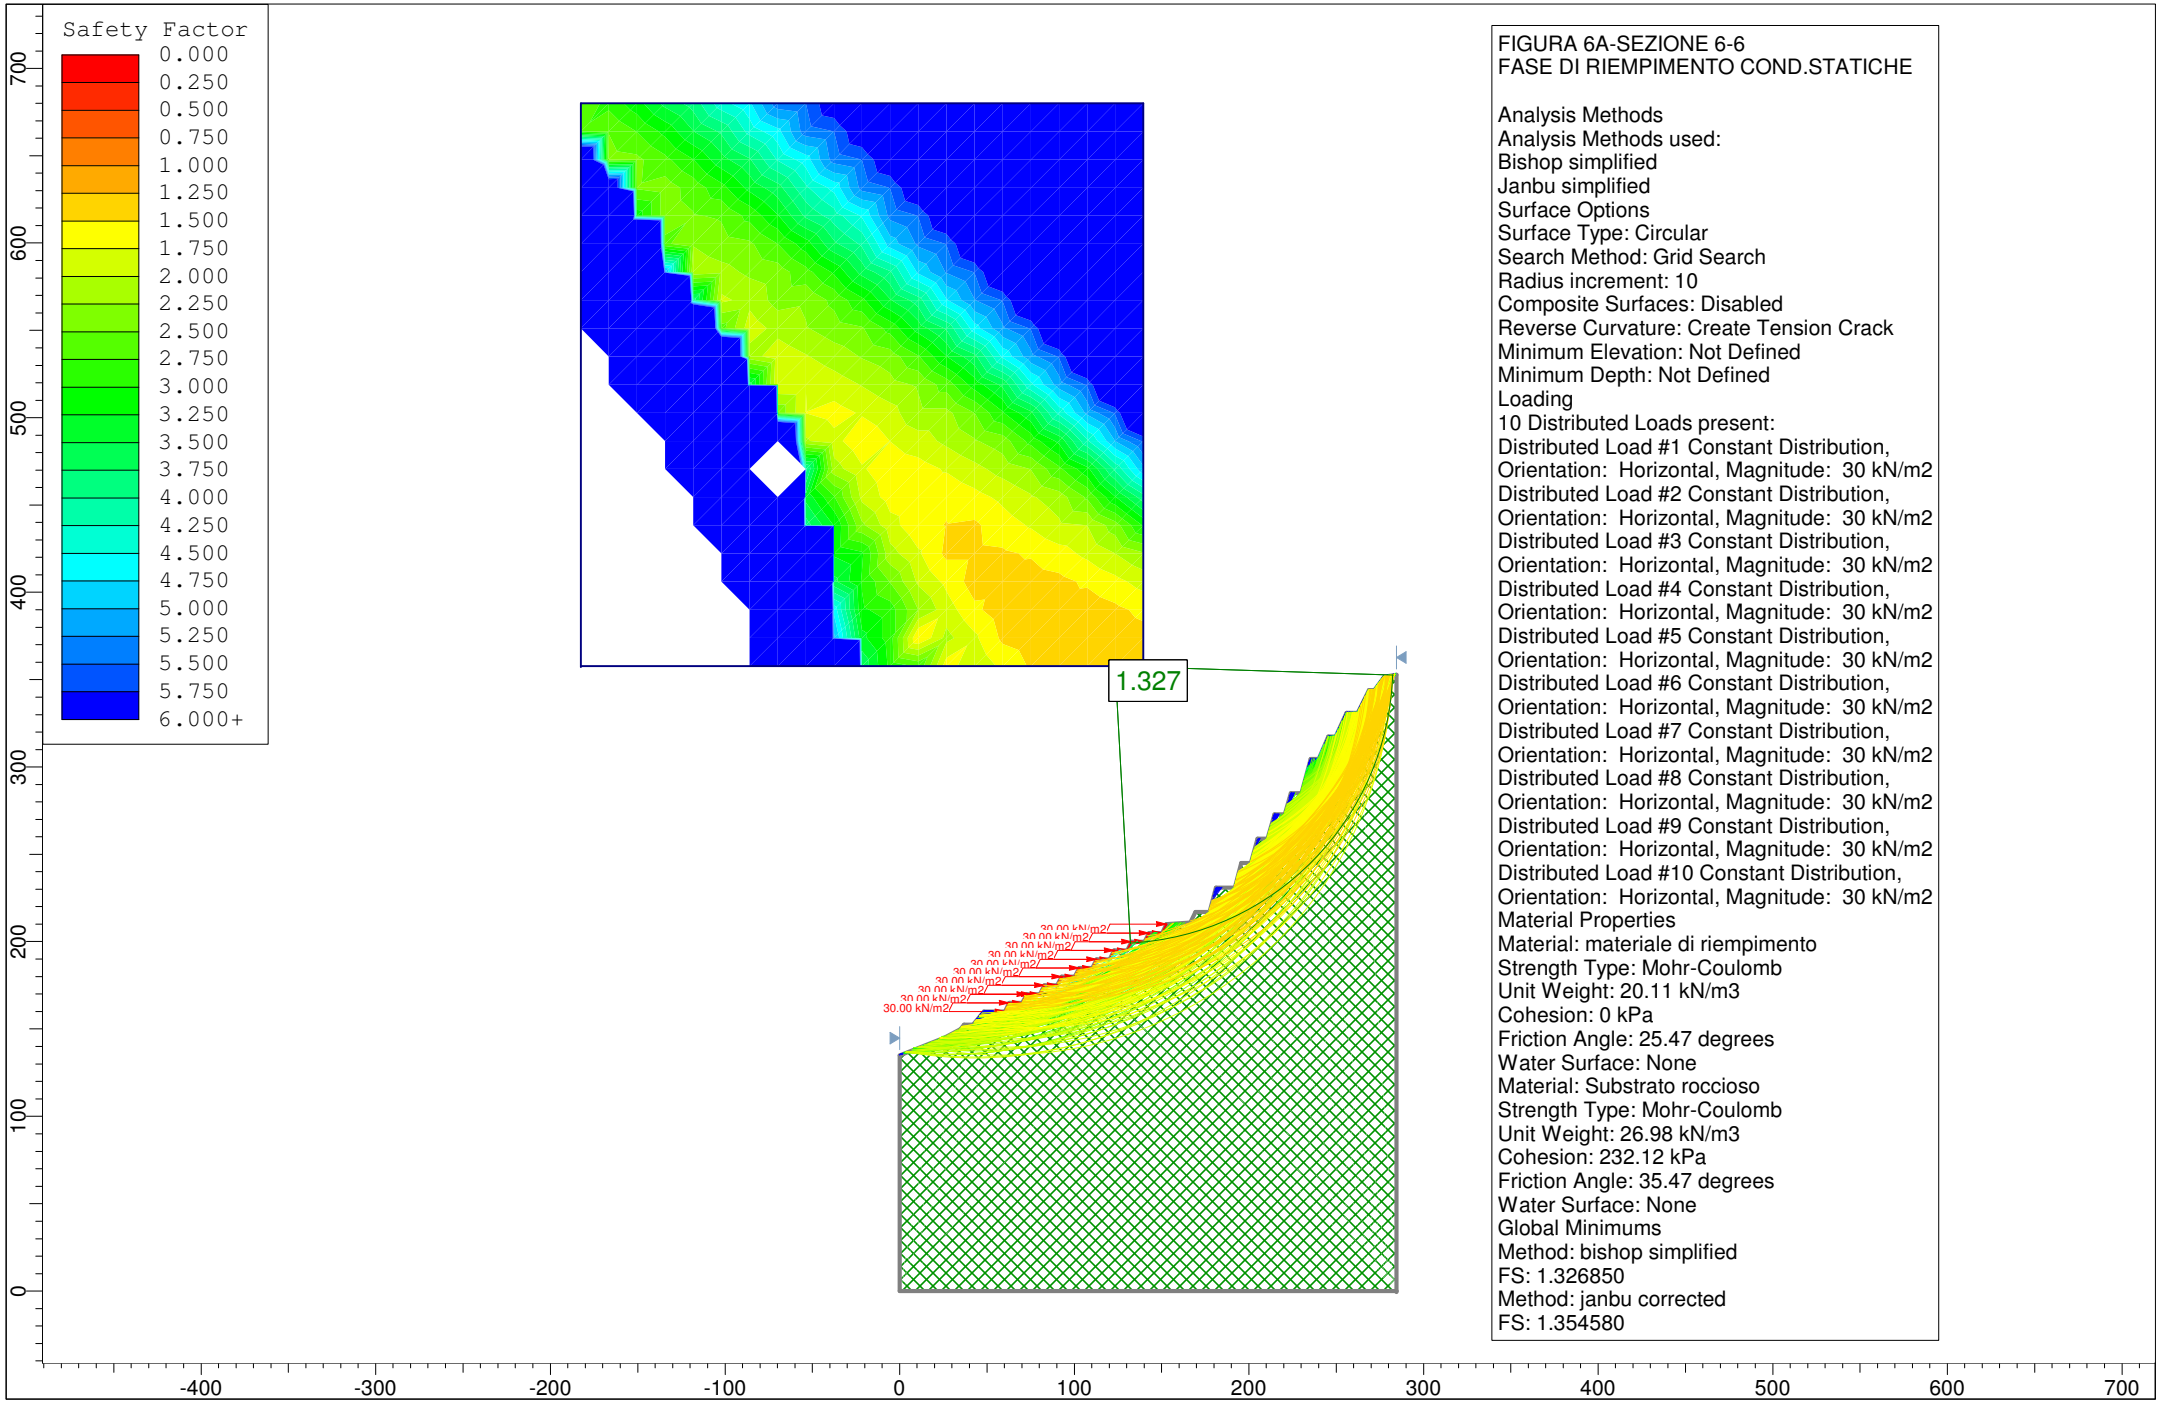


FIGURA 6A-SEZIONE 6-6
FASE DI RIEMPIMENTO COND.STATICHE

Analysis Methods
Analysis Methods used:
Bishop simplified
Janbu simplified
Surface Options
Surface Type: Circular
Search Method: Grid Search
Radius increment: 10
Composite Surfaces: Disabled
Reverse Curvature: Create Tension Crack
Minimum Elevation: Not Defined
Minimum Depth: Not Defined
Loading
10 Distributed Loads present:
Distributed Load #1 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #2 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #3 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #4 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #5 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #6 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #7 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #8 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #9 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Distributed Load #10 Constant Distribution,
Orientation: Horizontal, Magnitude: 30 kN/m2
Material Properties
Material: materiale di riempimento
Strength Type: Mohr-Coulomb
Unit Weight: 20.11 kN/m3
Cohesion: 0 kPa
Friction Angle: 25.47 degrees
Water Surface: None
Material: Substrato roccioso
Strength Type: Mohr-Coulomb
Unit Weight: 26.98 kN/m3
Cohesion: 232.12 kPa
Friction Angle: 35.47 degrees
Water Surface: None
Global Minimums
Method: bishop simplified
FS: 1.326850
Method: janbu corrected
FS: 1.354580